



GAD-HAD-SAD100

3Gb/s, HD, SD embedded domain audio description and voice-over processor

A Synapse ® product

Synapse

Quad speed
MASTER

3 TRIPLE RATE
GB/s, HD, SD

 Powered
by **LINUX**


Upgradable to
3Gb/s

COPYRIGHT © 2014 AXON DIGITAL DESIGN BV

ALL RIGHTS RESERVED


NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM WITHOUT THE PERMISSION OF AXON DIGITAL DESIGN BV.

Block schematic & I/O panel

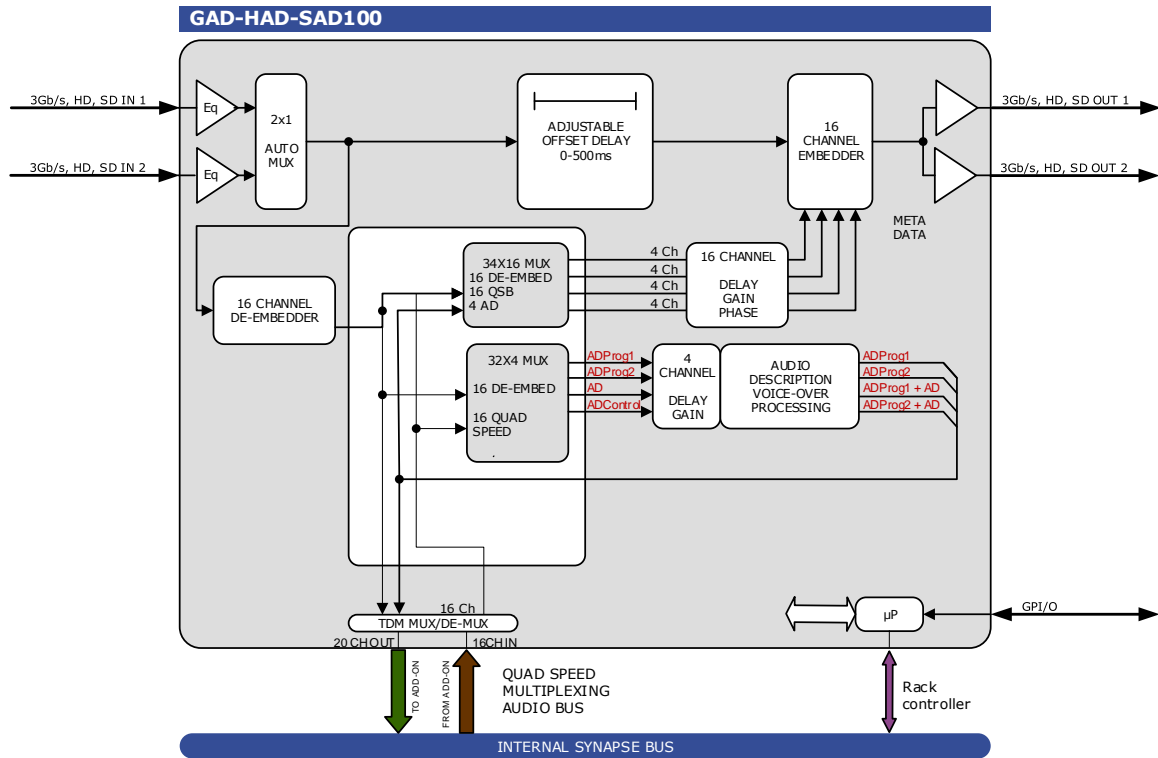

- 3Gb/s, HD, SD SDI INPUT 1 (OPTIONAL FIBER INPUT)
- 3Gb/s, HD, SD SDI INPUT 2 (OPTIONAL FIBER INPUT)
- 3Gb/s, HD, SD SDI OUT 1 (OPTIONAL FIBER OUTPUT)
- 3Gb/s, HD, SD SDI OUT 2 (OPTIONAL FIBER OUTPUT)
- GPI/METADATA INPUT/OUTPUT
- NOT CONNECTED

BPH18D BHX18D

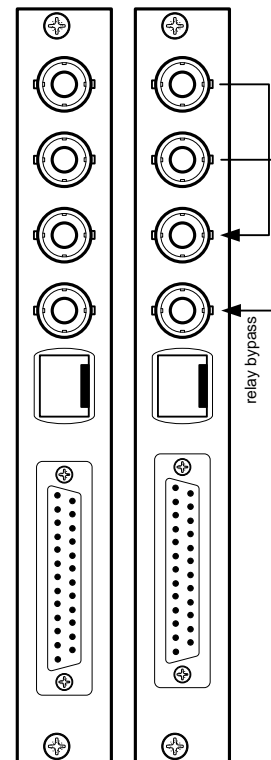

Features

The GAD100, HAD100 and SAD100 are embedded domain Audio Description processors with a Voice-Over mode. This processor uses a stereo track as main program (input 1-2 of the AD processor) and mixes the AD track triggered by the mix enable track (input 3-4 of the AD processor).

The output of the AD processor can be routed to PCM channels of the 16 channel embedder or Quad Speed Bus.

The Quad Speed audio bus allows for implementation of 'in between' audio processing. This means that we can stream the de-embedded audio channels or audio described (mixed) channels to a Quad Speed Audio ADD-ON card like the DLA44, DSF66 or any of the other available Quad Speed Bus enabled cards, process this audio and send it back to the G/H/SAD100 for The ADD-ON card does not need a connector panel and all audio routing is performed inside the Synapse frame by just placing these cards in adjacent slots.

The SAD100 and HAD100 can be future upgraded to GAD100. This allows for staged implementation of SD to HD infrastructures and spread the cost over multiple budget years.

- Audio Description processor with free routable I/O
- 2 SDI inputs (with auto switch on carrier loss, and switch back function)
- Compatible with the following input formats (auto selecting) (1080p only for GAD):
 - 1080p/59.94
 - 1080p/50
 - 1080i/59.94
 - 1080i/50
 - 1080p/29.97
 - 1080p25
 - 1080p(sf)/23.98
 - 720p/59.94
 - 720p50
 - SD525
 - SD625
- Offset video delay adjustable between 0 and 1000ms
- Quad Speed Audio ADD-ON bus for bidirectional audio processing
- 2 SDI + embedded audio outputs
- 7 presets that configure all 16 output channels at once, controlled by GPI or ACP (Cortex)
- Append and overwrite modes
- Audio level and phase control
- Audio offset delay up to 5000 ms
- Peak detection 0dBFS
- Silence detection with threshold (-100 to -20dBFS) and time control (1 to 255 sec)
- Transparent for ATC time code RP188, RP196, RP215
- Built-in linesync (autophaser)
- Locks to Tri-level, Bi-level syncs or input
- Full control and status monitoring through the front panel of the SFR04/SFR08/SFR18 frame and the Ethernet port (ACP)
- Optional 1 or 2 fiber inputs, 1 or 2 fiber outputs or a fiber in and output (replacing 1 SDI in and output) on the I/O panel
- Optional relay bypass (BHX18D)

Complementary cards:

- DLA44, DLA43, DLA42, DLA41 and DIO88 (plus all current and future quad speed audio ADD-ON cards)

Applications

- 3Gb/s, HD and SD embedded Audio Description Processing
- 3Gb/s, HD and SD embedded Voice-Over Processing
- Preset based 16 channel audio (AD) shuffling

Ordering information

Module:

- **GAD100:** 3Gb/s, HD, SD embedded domain Audio Description/ Voice-Over processor
- **HAD100:** HD, SD embedded domain Audio Description/ Voice-Over processor
- **SAD100:** SD embedded domain Audio Description/ Voice-Over processor

Standard I/O:

- **BPH18D_GAD100:** I/O panel for GAD/HAD/SAD100

Relay bypass I/O:

- **BHX18D_GAD100 GAD100:** I/O panel for GAD/HAD/SAD100 with relay bypass

Fiber outputs:

- **BPH18DT_FC/PC_GAD100:** I/O panel for GAD/HAD/SAD100 with one fiber transmitter
- **BPH18DT2_FC/PC_GAD100:** I/O panel for GAD/HAD/SAD100 with two fiber transmitters
- **BPH18DT_SC_GAD100:** I/O panel for GAD/HAD/SAD100 with one fiber transmitter
- **BPH18DT2_SC_GAD100:** I/O panel for GAD/HAD/SAD100 with two fiber transmitters

Fiber inputs:

- **BPH18DR_FC/PC_GAD100:** I/O panel for GAD/HAD/SAD100 with (future use) balanced AES/EBU inputs with one fiber receiver
- **BPH18DR2_FC/PC_GAD100:** I/O panel for GAD/HAD/SAD100 with (future use) balanced AES/EBU inputs with two fiber receiver
- **BPH18DR_SC_GAD100:** I/O panel for GAD/HAD/SAD100 with (future use) balanced AES/EBU inputs with one fiber receiver
- **BPH18DR2_SC_GAD100:** I/O panel for GAD/HAD/SAD100 with (future use) balanced AES/EBU inputs with two fiber receiver

Fiber inputs and outputs:

- **BPH18DTR_FC/PC_GAD100:** I/O panel for GAD/HAD/SAD100 with one fiber transmitter and receiver
- **BPH18DTR_SC_GAD100:** I/O panel for GAD/HAD/SAD100 with one fiber transmitter and receiver

Specifications

Serial Video Input

Standard	SD,HD and 3Gb/s SDI: SMPTE 292M, SMPTE 259M, SMPTE424
Number of Inputs	2
Connector	BNC
Equalization	Typical maximum equalized length of Belden 1694A cable: 90m at 2.97Gb/s, 120m at 1.485Gb/s, and 250m at 270Mb/s
Return Loss	> 15dB up to 1.5GHz

Serial Video Output

Number of Outputs	2
Connector	BNC
Signal Level	800mV nominal
DC Offset	0V \pm 0.5V
Rise/Fall Time	135ps nominal
Overshoot	< 10% of amplitude
Return Loss	> 15dB up to 1.5GHz (typ.) > 10dB up to 3GHz (typ.)
Wideband Jitter	< 0.2UI

Reference Input through RRC

Number of Inputs	2 on SFR18, 2 on SFR08 and 1 on SFR04
Tri-level	SMPTE274M, SMPTE296M 600 mVp-p nominal, 75 Ohms terminated through loop
Bi-level	PAL Black Burst ITU624-4/SMPTE318, Composite NTSC SMPTE 170M 1Vp-p nominal, 75 Ohms terminated through loop

Miscellaneous

Weight	Approx. 250g
Operating Temperature	0 °C to +50 °C
Dimensions	137 x 296 x 20 mm (HxLxD)

Electrical

Voltage	+24V to +30V
Power	<15 Watts