

GDR108

3Gb/s, HD and SD dual input distribution amplifier with 8 reclocked outputs (ASI/DVB compatible)

A Synapse® product











COPYRIGHT ©2015 AXON DIGITAL DESIGN BV

ALL RIGHTS RESERVED

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM WITHOUT THE PERMISSION OF AXON DIGITAL DESIGN BV.

Block Schematic & I/O panel

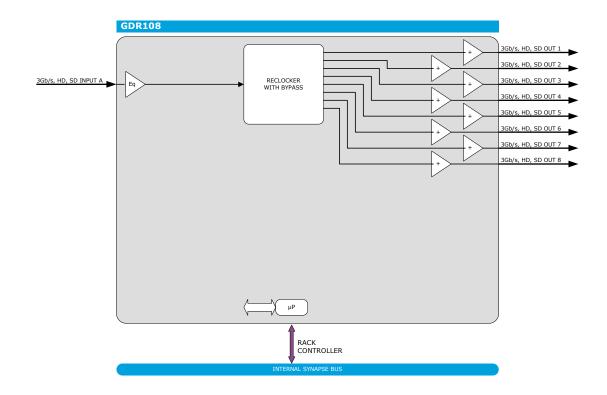

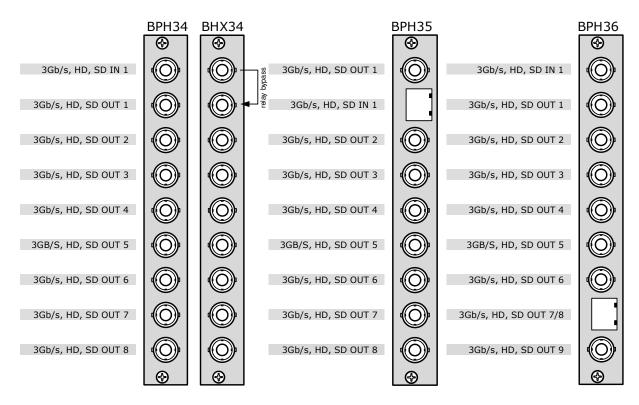

Digital Video Distribution

Features

The GDR108 is a single channel 3Gb/s, HD, SD SDI reclocking distribution amplifier. This card is ASI/DVB compatible

- Compatible with:
 - SD SDI 270 Mbit/s (SMPTE 259M)
 - HD SDI 1485 Mbit/s (SMPTE 292M)
 - 3Gb/s SDI 2970 Mbit/s (SMPTE 424M)
 - ASI/DVB
- Bypass function of the reclocker for non-standard frequencies
- Choice of IO standards through use of SFP modules
 - Single Fiber, CVBS, SDI or HDMI input with BPH35
 - Dual fiber, dual CVBS, dual SDI outputs with BPH36

Applications

The GDR108 can be used as a single channel generic wideband 3Gb/s DA

Ordering information

Module:

GDR108: 3Gb/s, HD, SD-SDI reclocking distribution amplifier

Standard I/O:

BPH34_GDR108: I/O-panel for GDR108

Relay bypass I/O:

BHX34_GDR108: I/O-panel with relay bypass for GDR108

SFP I/O:

- **BPH35_GDR108:** I/O-panel with SFP module input option
- **BPH36_GDR108:** I/O-panel with SFP module output option

Digital Video Distribution

Specifications

Video Input

Standard 3Gb/s ,HD and SD SDI: SMPTE424, SMPTE259M, SMPTE

292M

Number of Inputs 1 **Connector** BNC

Equalization Typical maximum equalized length of Belden 1694A cable:

150m at 2.97Gb/s, 150m at 1.485Gb/s, and 190m at

270Mb/s

Return Loss > 15dB up to 3GHz

Serial Video Output

Standard 3Gb/s ,HD and SD SDI: SMPTE424, SMPTE259M, SMPTE

292M

Number of Outputs 8 (configurable)

Connector BNC

Signal Level800mV nominalDC Offset $0V \pm 0.5V$ Rise/Fall Time135ps nominalOvershoot< 10% of amplitudeReturn Loss> 15dB up to 1.5GHz (typ.)

> 10dB up to 3GHz (typ.)

Wideband Jitter < 0.2UI

Miscellaneous

Weight Approx. 250g **Operating Temperature** 0 °C to +50 °C

Dimensions 137 x 296 x 20 mm (HxWxD)

Electrical

Voltage +24V to +30V Power <6 Watts