

GSU100/110-HSU100/110

3Gb/s, HD, SD up converter/synchronizer with optional audio shuffler

A Synapse® product















COPYRIGHT © 2015 AXON DIGITAL DESIGN BV

ALL RIGHTS RESERVED

NO PART OF THIS DOCUMENT MAY BE REPRODUCED IN ANY FORM WITHOUT THE PERMISSION OF AXON DIGITAL DESIGN BV.

Block schematic & I/O panel

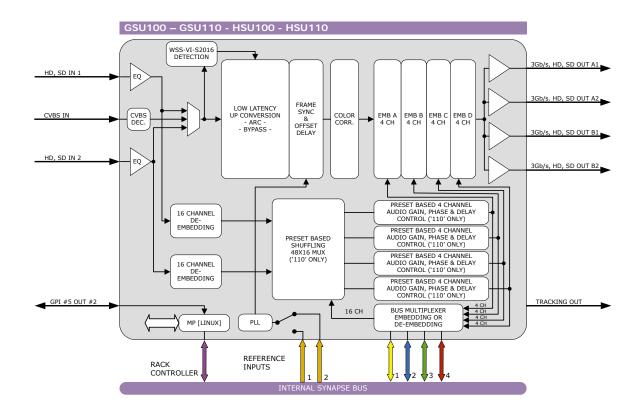

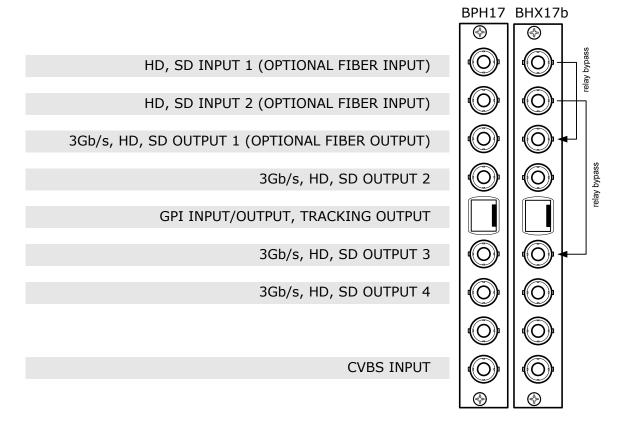

Features

The GSU100/110 and HSU100/110 are *low latency* up-converters with 16 channel audio transparency. The powerful matrix multiplexer can feed audio from the embedded domain into the Synapse bus to an ADD-ON card like the DIO48. This matrix multiplexer also allows for audio to be inserted from the ADD-ON bus into the embedded domain of the GSU100/110 or HSU100/110.

The GSU110 or HSU110 add a full audio shuffler and audio proc-amp with gain and phase control.

The GSU100/110 is compatible with 270Mb/s, 1.5Gb/s and 3Gb/s for full 1080p/50 or 1080p/59.94 use. The HSU100/110 are compatible with SD-SDI (270Mb/s) and HD-SDI (1.5Gb/s) and can be future upgraded to 3Gb/s compatibility

- 3 inputs: 2 SDI and 1 composite.
- Low latency conversion process (as low as 1 field in controlled timing environment)
- Compatible with the following input and output formats (auto selecting). One standard can be chosen for both outputs simultaneously:

 1080p/59.94 (2GU only)
 720p/59.94

 1080p/50 (2GU only)
 720p/50

 1080i/59.94
 720p/23.98

 1080i/50
 SD525

 1080p/23.98
 SD625

- 1080psf/23.98
- Two individual conversion paths. The inputs can be different standards SD or HD and unlocked to the single output format.
- Frame sync with output phase control in Frames, Lines and pixels with respect to reference. Delay setting are stored per output format for a constant latency operation.
- 30 frames (1080i/p), 60 frames (720p) or 125 frames (SD) delay offset per channel
- ARC modes contain:

Anamorphic
Center Cut
V-Zoom
LBox-14:9
PBox-4:3
PBox-14:9

- LBox-16:9
 Variable H and V (50—200%)
- 16 Free individual programmable presets banks for:
 - Up converter ARC A and B
 - Transparent ARC A and B
 - VI/WSS/S2016 insertion A and B
 - Embedder shuffling/Gain/Phase (-110 only)
- 5 GPI inputs assignable to various preset banks
- ARC triggers by VI, WSS, WSSext and S2016 (AFD)
- Transparent for 16 channels of embedded audio
- Individual color corrector (RGB and total gain, RGB and total black)
- Embedded domain cross input audio shuffling, gain and phase control (GSU/HSU110 only)
- Embedding and de-embedding through synapse bus
- Video proc-amp (Y and C control)
- Hue control for NTSC inputs
- Locks to Tri-level, Bi-level or SDI input
- WST to OP47 cross conversion
- Timecode cross conversion
- Auxiliary timecode input, allowing for 2 separate timecodes
- CC-608 to CC-708 conversion
- 6 Line Vertical Ancillary Blanking transparency in transparent mode
- Full control and status monitoring through the front panel of the SFR04/SFR08/SFR18 frame and the Ethernet port (ACP)

Complementary cards:

DAC20, DAC24, DAS24, DIO48, ADC20, ADC24, DIO24, DLA44, DLA43

Conversion abilities

The G-HSU100/110 can handle the following conversions:

		Output										
	CONVERSION	1080psf23.97	1080p23.97	1080p50*	1080p59.94*	1080i59.94	1080i50	720p59.94	720p50	720p23.98	480i59.94(525)	576i50(625)
SDI Input	1080psf23.97	х										
	1080p23.97		х									
	1080p50*			х								
	1080p59.94*				х							
	1080i59.94					х						
	1080i50						х					
	720p59.94							х				
	720p50								х			
	720p23.98									х		
	480i59.94(525)	х	х			х		х		х	х	
	576i50(625)			х			х		х			х
CVBS	480i59.94(NTSC)	х	х			х		х		х	х	
	576i50(PAL)			х			х		х			х

^{* =} GSU models only

Applications

- Truck input up converter/synchronizer
- Infra structure up/down/cross conversion

Ordering information

Module:

- GSU100: 3Gb/s, HD, SD-SDI up converter
- GSU110: 3Gb/s, HD, SD-SDI up converter with audio shuffler proc-amp
- HSU100: HD, SD-SDI up converter*
- HSU110: HD, SD-SDI up converter with audio shuffler proc-amp*

Standard I/O:

BPH17_GSUxxx: I/O-panel for G-HSU100/110

Relay bypass I/O:

BHX17b_GSUxxx: I/O-panel for G-HSU100/110

Fiber outputs:

- BPH17T_FC/PC_GSUxxx: I/O panel for G-HSU100/110 with one fiber transmitter on FC/PC
- BPH17T_SC_GSUxxx: I/O panel for G-HSU100/110 with one fiber transmitter on SC

Fiber inputs:

- BPH17R2_FC/PC_GSUxxx: I/O panel for G-HSU100/110 with two fiber receivers on FC/PC
- BPH17R2_SC_GSUxxx: I/O panel for G-HSU100/110 with two fiber receivers on SC

For other fiber options please contact AXON

* Upgradeable to 3Gb/s

Specifications

Serial Video Input

Standard SD,HD and 3Gb/s SDI: SMPTE 292M, SMPTE 259M,

SMPTE424

Number of Inputs 2 Connector BNC

Equalization Typical maximum equalized length of Belden 1694A cable:

90m at 2.97Gb/s, 120m at 1.485Gb/s, and 250m at 270Mb/s

Return Loss > 15dB up to 1.5GHz

CVBS Video Input

Standard PAL (ITU624-4), NTSC (SMPTE 170M)

Encoding 12 bits
Number of Inputs 1

Impedance 75 Ohms

Return Loss > 35dB up to 10MHz

Frequency Response $< \pm 0.25$ dB (100KHz to 4.2MHz)

Differential Gain $< \pm 0.5\%$ typicalDifferential Phase $< \pm 0.2^{\circ}$ typical

Noise Floor < -57dB RMS (black video, 15KHz to 5MHz)

C/L Gain $< \pm 0.5\%$ C/L Delay $< \pm 9 \text{ns}$ Minimum Delay3 lines

Serial Video Output

Number of Outputs 4

Connector BNC

Signal Level800mV nominalDC Offset $0V \pm 0.5V$ Rise/Fall Time135ps nominalOvershoot< 10% of amplitudeReturn Loss> 15dB up to 1.5GH:

> 15dB up to 1.5GHz (typ)

> 10dB up to 3GHz (typ)

Wideband Jitter < 0.2UI

Reference Input through RRC

Number of Inputs 2 on SFR18, 2 on SFR08 and 1 on SFR04

Tri-level SMPTE274M, SMPTE296M

600 mVp-p nominal, 75 Ohms terminated through loop

Bi-level PAL Black Burst ITU624-4/SMPTE318, Composite NTSC

SMPTE 170M

1Vp-p nominal, 75 Ohms terminated through loop

Miscellaneous

Weight Approx. 450g
Operating Temperature 0 °C to +40 °C

Dimensions 137 x 296 x 20 mm (HxWxD)

Electrical

Voltage +24V to +30V Power <17 Watts