



Synapse

ASI10

Dual channel ASI/DVB monitor with 2x2 output switch and dual fan out per channel



A Synapse® product

DESIGNED FOR
ASI/DVB



Due to constant product research and development all specifications are subject to change without notice. EVS does not warrant or assume any legal liability or responsibility for the accuracy, completeness, availability and/or delivery of the products and/or services listed in this datasheet. Copyright © 2021 EVS

Block schematic & I/O panel

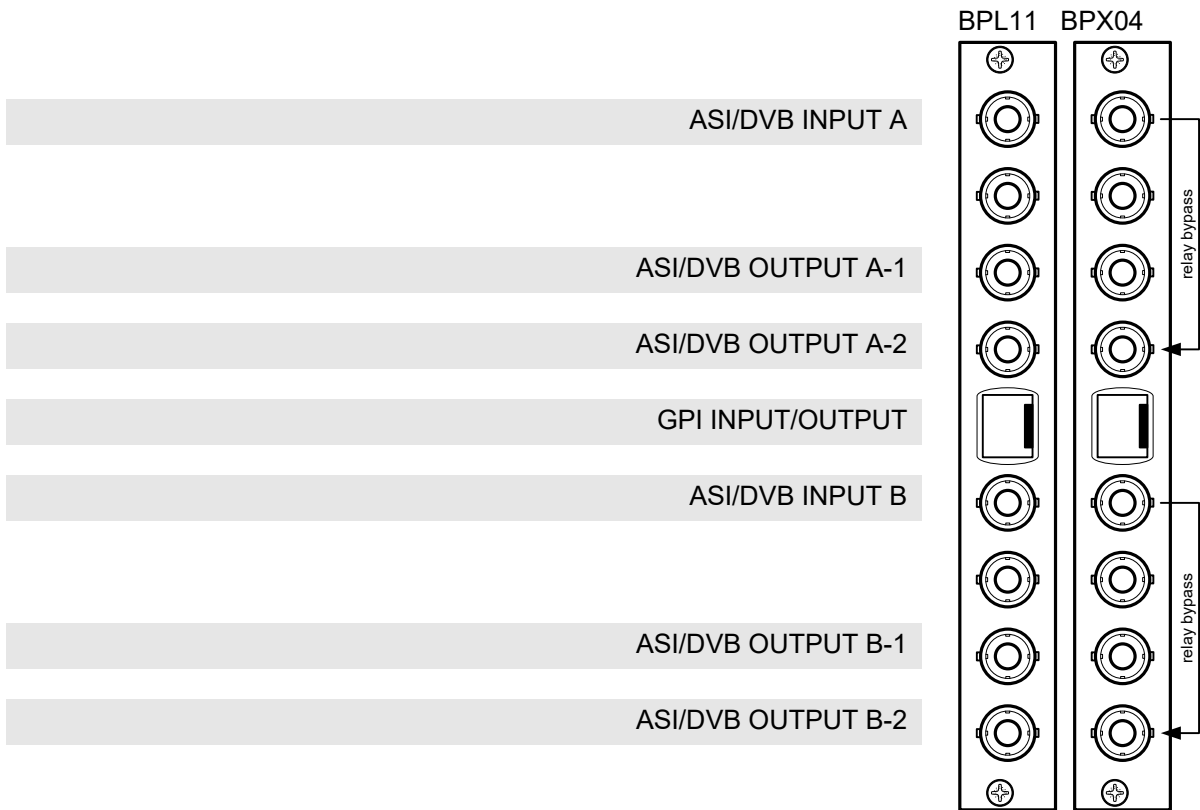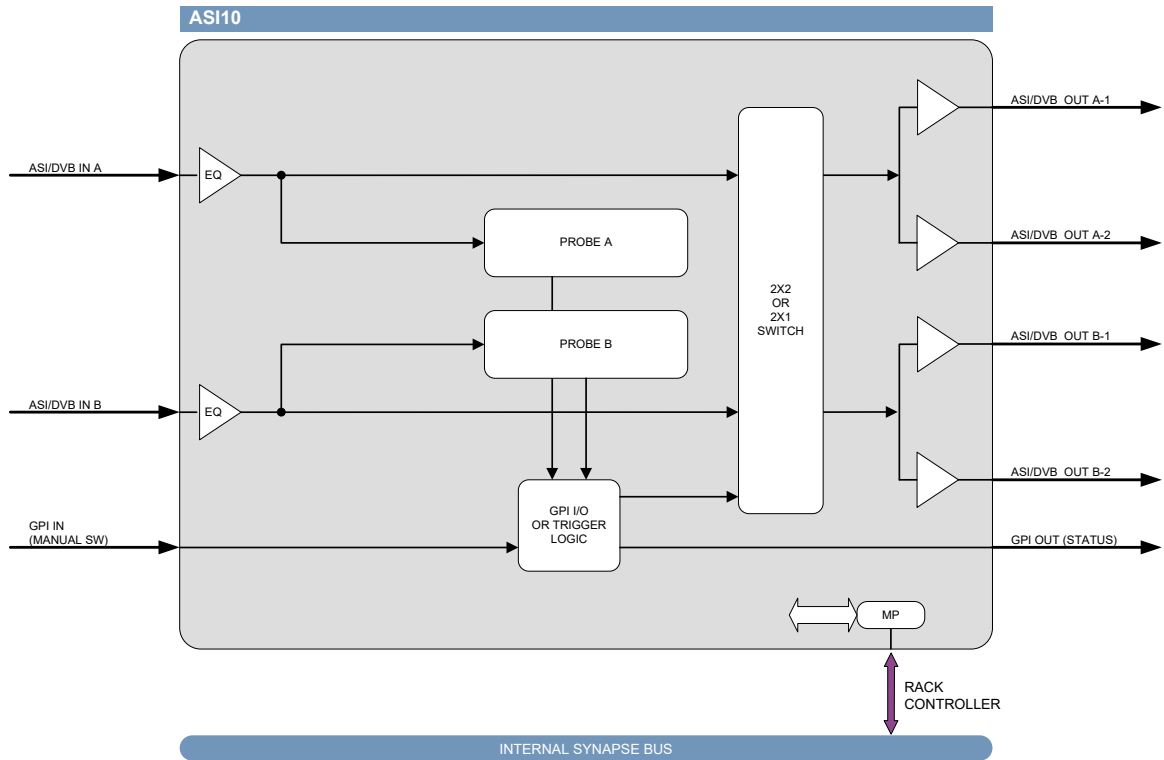

Features

The ASI10 is a dual channel ASI/DVB integrity checker with a 2x2 output switch. Each output has a dual fan-out for distribution of the signal

- 2x2 or 2x1 (4 outputs) mode
- Monitor ASI/DVB streams and triggering of corresponding alarms. These can be used to trigger a switch over.
 - Loss of Transport Stream sync bytes
 - Alarm trigger: sync acquisition, fail
 - No Transport Stream
 - Alarm trigger: data, no data
 - Transport Stream-rate
 - Alarm trigger with lower and upper limit breach
 - Data-rate
 - Alarm trigger with lower and upper limit breach
 - Null packets / Active data ratio
 - Alarm trigger:
 - Null packets > preset
 - Null packets < preset
 - Data packets per second > preset
 - Data packets per second < preset
 - Number of PIDs in the stream
 - Alarm trigger:
 - Total number of unique PIDs < preset
 - Total number of unique PIDs > preset
- Monitoring only
 - ASI data link mode
 - Empty
 - Byte
 - Packet
 - Burst
 - 188/204 mode
 - 188 Mode
 - 204 Mode
 - Indeterminate
 - Number of PIDs in the stream
 - Total number of PIDs per second
 - Total number of unique PIDs per second
- Full control and status monitoring through the front panel of the SFR04/SFR08/SFR18 frame and the Ethernet port (ACP)

Applications

- Generic ASI/DVB integrity monitoring and backup switching

Ordering information

Module:

- **ASI10:** Dual channel ASI/DVB monitor with 2x2 output switch

Standard I/O:

- **BPL11_ASI10:** I/O panel for ASI10
- **BPX04_ASI10:** I/O panel for ASI10 with relay bypass

Specifications

DVB/ASI serial video input

Standard	ISO/IEC 13818-1, BS EN 50083-9, EN 300 468, ATSC Doc. A/65C
Number of inputs	2 (1 per channel)
Equalization	Automatic up to 300m @ 270Mb/s or 100m @ 270Mb/s with BPX04 (ADD9420270012) with Belden 1694A or equivalent cable
Return loss	> 15dB up to 270MHz

DVB/ASI Serial Video Output

Standard	ISO/IEC 13818-1, BS EN 50083-9, EN 300 468, ATSC Doc. A/65C
Number of outputs	2 per channel or 4 in 2x1 mode
Signal level	800mV nominal
DC offset	0V \pm 0.5V
Rise/fall time	800ps nominal
Overshoot	< 10% of amplitude
Return loss	> 15dB up to 270MHz

Miscellaneous

Weight	Approx. 250g
Operating temperature	0 °C to 50 °C
Dimensions	137 x 296 x 20 mm (HxWxD)

Electrical

Voltage	+24V to +30V
Power	<9 Watts