



Synapse

BFM88-BFM89


CWDM 8 to 16 channel optical multiplexer/de-multiplexer

A Synapse® product



Due to constant product research and development all specifications are subject to change without notice. EVS does not warrant or assume any legal liability or responsibility for the accuracy, completeness, availability and/or delivery of the products and/or services listed in this datasheet. Copyright © 2021 EVS

Block Schematic & I/O panel

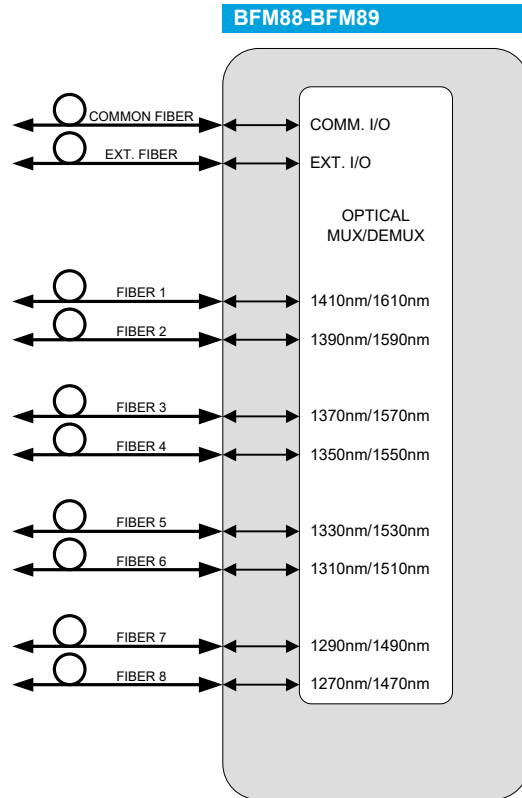

COMMON FIBER INPUT/OUTPUT
EXTENDED FIBER INPUT/OUTPUT


FIBER INPUT/OUTPUT 1
FIBER INPUT/OUTPUT 2

FIBER INPUT/OUTPUT 3
FIBER INPUT/OUTPUT 4

FIBER INPUT/OUTPUT 5
FIBER INPUT/OUTPUT 6

FIBER INPUT/OUTPUT 7
FIBER INPUT/OUTPUT 8

BFM88/89

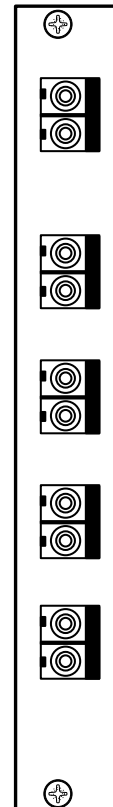

Features

The BFM88 and BFM89 are passive optical multiplexing/de-multiplexing modules onto single mode fibers. These modules allow you to multiplex or de-multiplex 8 wavelengths onto or from one fiber with use of CDWM technology. The BFM88 can handle 8 wavelengths from 1270nm to 1410nm and the BFM89 from 1470nm to 1610nm. An extra functionality added to these products is the option to have extended inputs/outputs. This will give you the opportunity to cascade two back panels. This enables users to mux/demux 16 channels onto one fiber, worlds most dense CWDM solution.

Average fiber distance up to 15km with GFT80 + BFT88/BFT89 and GFR80 + BFR80 combo's at 3Gb/s.

- Up to 16ch 3Gb/s - HD-SDI CWDM system in only 1RU, world's most compact CWDM solution
- Bi-directional mux/demux of up to 16 wavelengths from 1270nm to 1610nm
- Expandable from 8 to 16 channels
- Low insertion loss
- High stability and reliability. Failsafe because back panel is passive
- fiber inputs/outputs on LC/LC connectors
- One common input/output for combined wavelengths
- Wide pass band
- Fiber protection on back panel
- Occupies only one back panel slot for every 8 channels
- Connector panel can also be used outside a Synapse frame (not sacrificing a slot)

Applications

- High Density fiber transmission
- (Existing)Studio infrastructure
- OB I/O
- Line monitoring
- WDM network
- Telecommunication
- Fiber optical amplifiers
- Access Network

Ordering information

Standard I/O:

- **BFM88:** 8 channel fiber CWDM module with LC connectors 1270nm-1410nm
- **BFM89:** 8 channel fiber CWDM module with LC connectors 1470nm-1610nm

Specifications

Optical Connections

Number of connections	10
Connector	LC with PC/UPC polish

Mux/demux optical

Operating Wavelength	ITU-T Grid – BFM88: 1270nm, 1290nm, 1310nm, 1330nm, 1350nm, 1370nm, 1390nm, 1410nm - BFM89: 1470nm, 1490nm, 1510nm, 1530nm, 1550nm, 1570nm, 1590nm, 1610nm
Passband@0.5dB	>=14nm
Channel spacing	20 GHz
Pass band	+/-6.5nm
Pass band Flatness	<=0.5 dB
Insertion Loss (dB)	Typ. 4.3 dB Max. 5.0 dB
Adjacent Isolation	>30 dB
Insertion Loss Temp. Sensitivity	<0.005 dB/°C
Wavelength Temperature Shifting	<0.002 nm/ °C
Polarization Dependent Loss	<0.25 dB
Polarization Mode Dispersion	<0.15 ps
Directivity	>50 dB
Return Loss	>45 dB
Power Handling	300 mW

Miscellaneous

Weight	Approx. 450g
Operating Temperature	0 °C to +70 °C
Storage Temperature	-40 °C to +85 °C
Dimensions	137 x 150 x 20 mm (HxWxD)