



Synapse

GDS010



3Gb/s, HD, SD basic down converter/synchronizer

A Synapse® product



Due to constant product research and development all specifications are subject to change without notice. EVS does not warrant or assume any legal liability or responsibility for the accuracy, completeness, availability and/or delivery of the products and/or services listed in this datasheet. Copyright © 2021 EVS

Block schematic & I/O panel

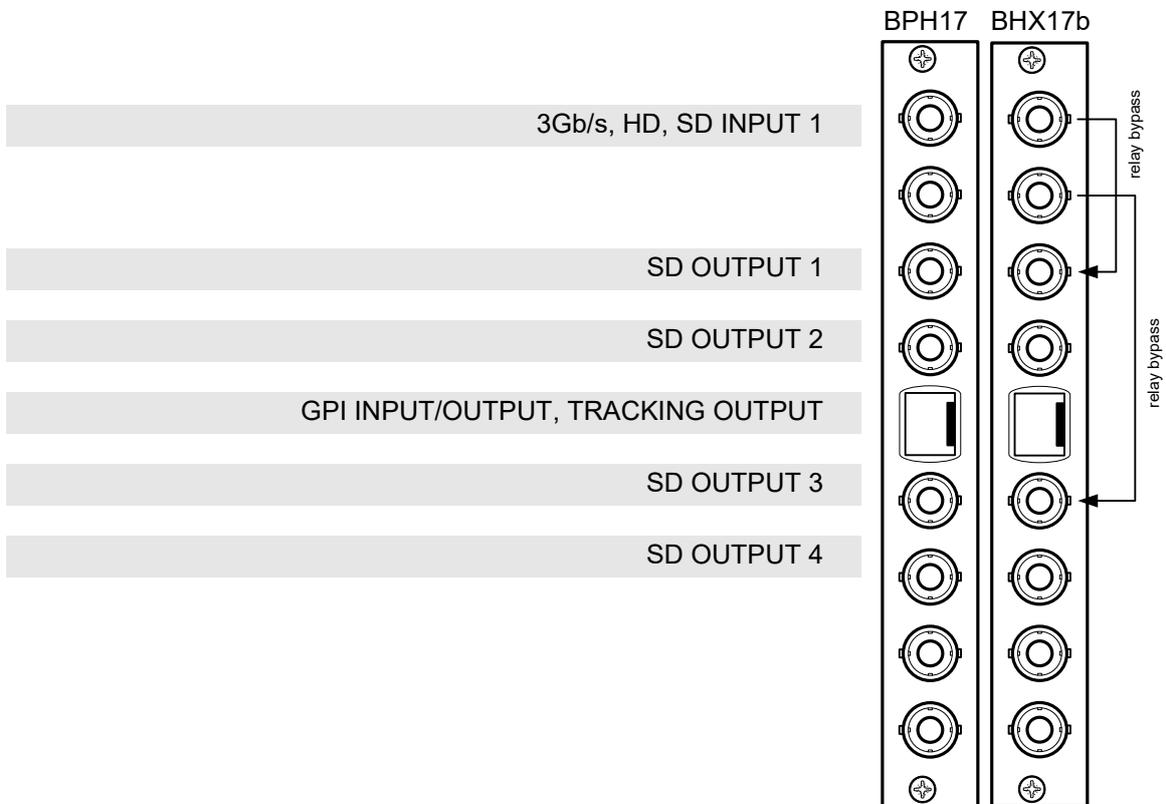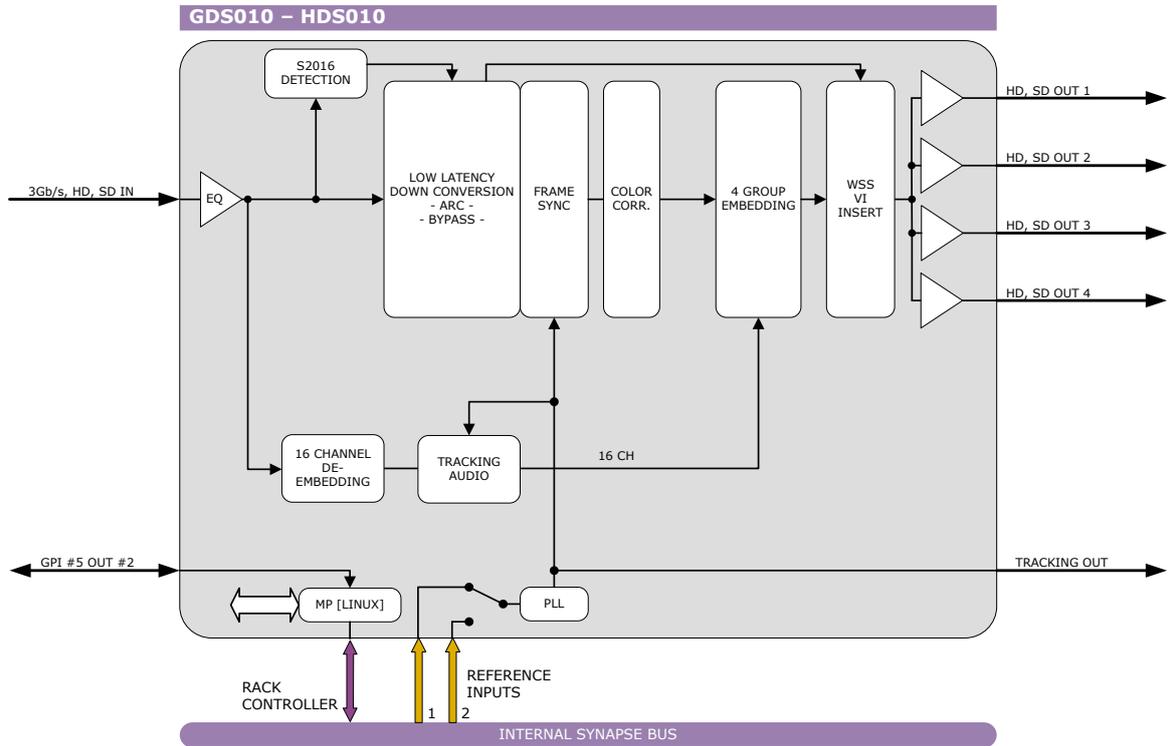

Features

The GDS010 is a *low latency* down converters with 16 channel audio transparency. The powerful matrix multiplexer can feed audio from the embedded domain into the Synapse bus to an ADD-ON card like the DIO48.

The GDS010 is compatible with 270Mb/s, 1.5Gb/s and 3Gb/s for full 1080p/50 or 1080p/59.94 use.

- Low latency conversion process (as low as 1 field in controlled timing environment)
- Compatible with the following input formats (auto selecting):
 - 1080p/59.94 (2GS only)
 - 1080p/50 (2GS only)
 - 1080i/59.94
 - 1080i/50
 - 1080p/23.98
 - 1080psf/23.98
 - 720p/59.94
 - 720p/50
 - 720p/23.98
 - SD525
 - SD625
- Output standards (one standard can be chosen for both outputs simultaneously): SD525, SD625
- Frame sync with output phase control in Lines and pixels with respect to reference.
- ARC modes contain:
 - Anamorphic
 - Center Cut
 - V-Zoom
 - LBox-16:9
 - LBox-14:9
 - PBox-4:3
 - PBox-14:9
 - Variable H and V (50—200%)
- 16 Free individual programmable presets banks for:
 - Down converter ARC A and B
 - Transparent ARC A and B
 - VI/WSS/S2016 insertion A and B
 - Embedder shuffling/Gain/Phase (-110 only)
- 5 GPI inputs assignable to various preset banks
- ARC triggers by VI, WSS, WSSext and S2016 (AFD)
- Transparent for 16 channels of embedded audio
- Video proc-amp (Y and C control)
- Color corrector (RGB and total gain, RGB and total black)
- Hue control for NTSC inputs
- Locks to Bi-level syncs or SDI input
- OP47 to WST cross conversion
- Timecode cross conversion
- Auxiliary timecode input, allowing for 2 separate timecodes
- CC-708 to CC-608 conversion
- 6 Line Vertical Ancillary Blanking transparency in transparent mode
- Full control and status monitoring through the front panel of the SFR04/SFR08/SFR18 frame and the Ethernet port (ACP)

Applications

Basic down conversion with transparent audio

Conversion abilities

The GDS010 can handle the following conversions:

| CONVERSION | | Output | | | | | | | | | | |
|------------|----------------|--------------|------------|---------|------------|------------|---------|-----------|--------|-----------|----------------|-------------|
| | | 1080psf23.97 | 1080p23.97 | 1080p50 | 1080p59.94 | 1080i59.94 | 1080i50 | 720p59.94 | 720p50 | 720p23.98 | 480i59.94(525) | 576i50(625) |
| SDI Input | 1080psf23.97 | x | | | | | | | | | x | |
| | 1080p23.97 | | x | | | | | | | | x | |
| | 1080p50 | | | x | | | | | | | | x |
| | 1080p59.94 | | | | x | | | | | | x | |
| | 1080i59.94 | | | | | x | | | | | x | |
| | 1080i50 | | | | | | x | | | | | x |
| | 720p59.94 | | | | | | | x | | | x | |
| | 720p50 | | | | | | | | x | | | x |
| | 720p23.98 | | | | | | | | | x | x | |
| | 480i59.94(525) | | | | | | | | | | x | |
| | 576i50(625) | | | | | | | | | | | x |

Ordering information

Module:

- **GDS010-I/O:** 3Gb/s, HD, SD down converter

Standard I/O:

- **BPH17-PANEL:** I/O-panel for GDS010

Relay bypass I/O:

- **BHX17b-PANEL:** I/O-panel for GDS010 with backup relay

Specifications

Serial Video Input

| | |
|-------------------------|---|
| Standard | SD,HD and 3Gb/s SDI: SMPTE 292M, SMPTE 259M, SMPTE424 |
| Number of Inputs | 2 |
| Connector | BNC |
| Equalization | Typical maximum equalized length of Belden 1694A cable: 90m at 2.97Gb/s, 120m at 1.485Gb/s, and 250m at 270Mb/s |
| Return Loss | > 15dB up to 1.5GHz |

Serial Video Output

| | |
|--------------------------|--|
| Number of Outputs | 4 |
| Connector | BNC |
| Signal Level | 800mV nominal |
| DC Offset | 0V \pm 0.5V |
| Rise/Fall Time | 135ps nominal |
| Overshoot | < 10% of amplitude |
| Return Loss | > 15dB up to 1.5GHz (typ.) > 10dB up to 3GHz (typ.) |
| Wideband Jitter | < 0.2UI |

Reference Input through RRC

| | |
|-------------------------|--|
| Number of Inputs | 2 on SFR18, 2 on SFR08 and 1 on SFR04 |
| Bi-level | PAL Black Burst ITU624-4/SMPTE318, Composite NTSC SMPTE 170M 1Vp-p nominal, 75 Ohms terminated through loop |

Miscellaneous

| | |
|------------------------------|---------------------------|
| Weight | Approx. 450g |
| Operating Temperature | 0 °C to +40 °C |
| Dimensions | 137 x 296 x 20 mm (HxWxD) |

Electrical

| | |
|----------------|--------------|
| Voltage | +24V to +30V |
| Power | <17 Watts |