



Synapse

2GF100/110



Dual channel 3Gb/s, HD, SD frame synchronizer
with optional audio shuffler

A Synapse® product



Due to constant product research and development all specifications are subject to change without notice. EVS does not warrant or assume any legal liability or responsibility for the accuracy, completeness, availability and/or delivery of the products and/or services listed in this catalog. Copyright © 2021 EVS

Block schematic & I/O panel

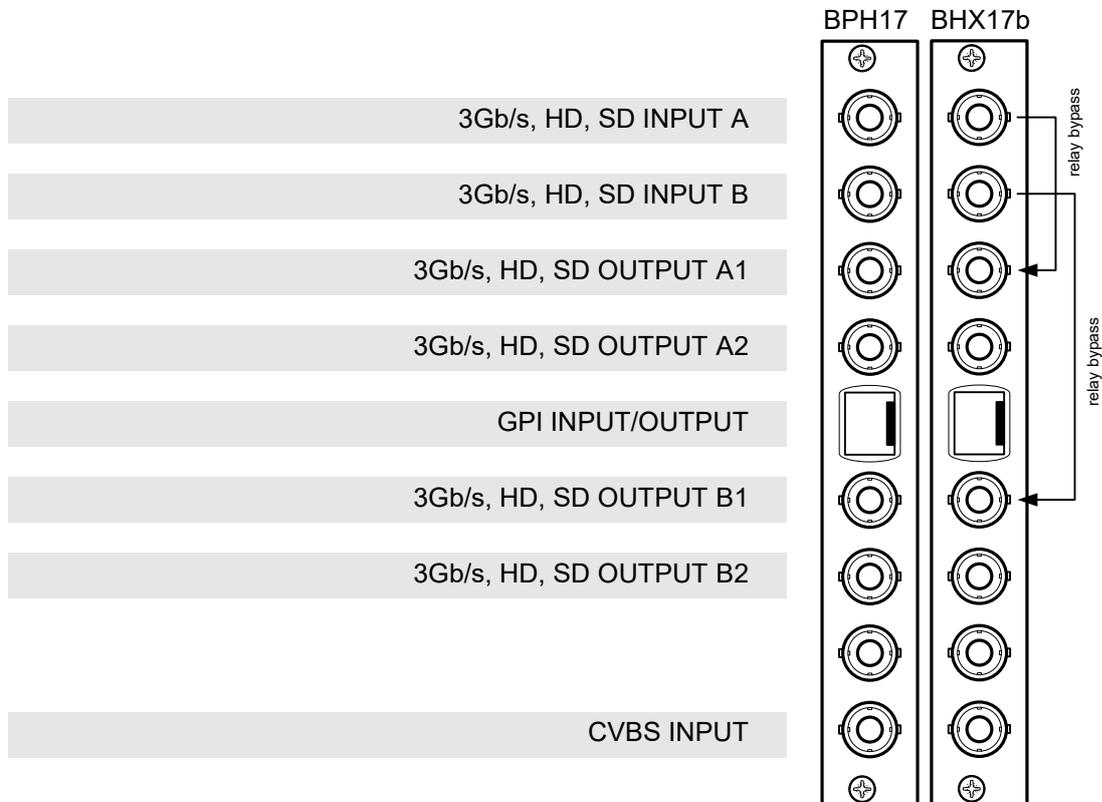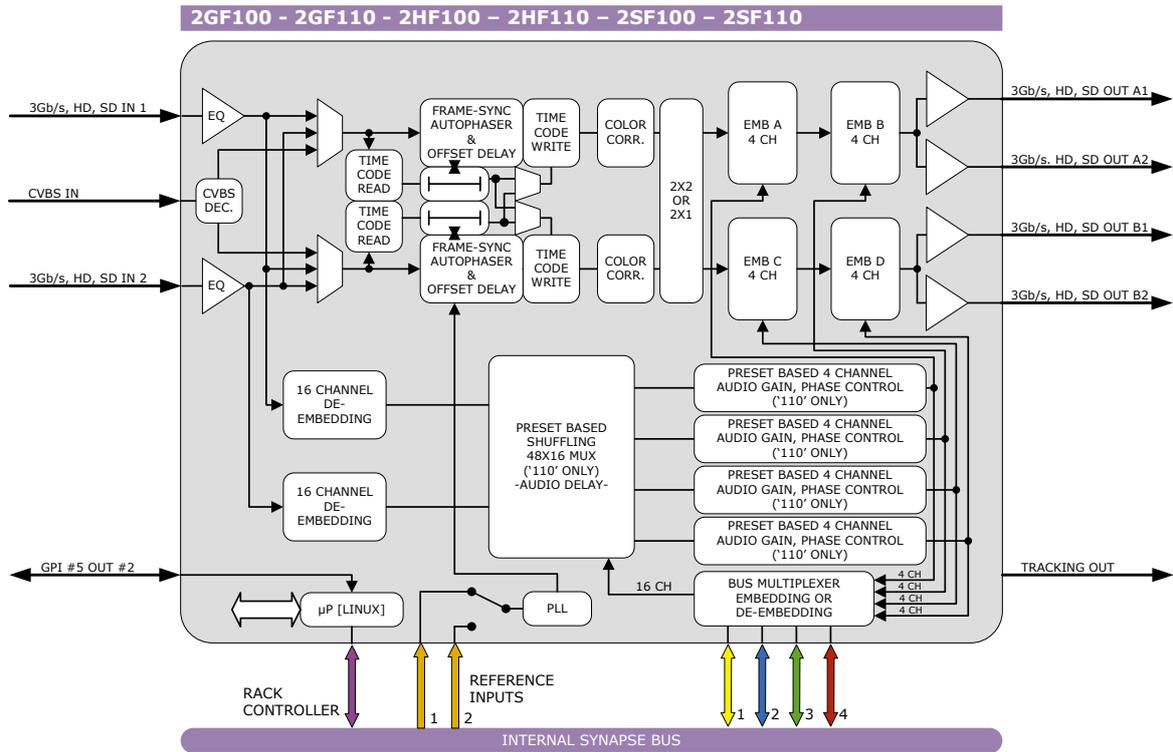

Features

The 2GF100/110 are dual channel frame synchronizers with backup inputs and 8 channel audio transparency and color correcting capabilities. The powerful matrix multiplexer can feed audio from the embedded domain into the Synapse bus to an ADD-ON card like the DIO48. This matrix multiplexer also allows for audio to be inserted from the ADD-ON bus into the embedded domain of the 2GF100/110. The 2GF110 adds a full audio shuffler and audio proc-amp with gain and phase control.

The 2GF100/110 also allows you to swap time-code data from channel one to channel two or vice versa where the delay timing of the time-code is copied from the source channel.

The 2GF100/110 is compatible with 270Mb/s, 1.5Gb/s and 3Gb/s for full 1080p/50 or 1080p/59.94 use.

- 3 inputs: 2 SDI and 1 composite.
- Configurable output function
 - Straight (1=1, 2=2)
 - Crossed (2=1, 1=2)
 - A only
 - B only
- Compatible with the following input formats (auto selecting) (1080p only for 2GF100/110). Please mind that the format and the framerate on both inputs have to be the same:

○ 1080p/59.94	○ 720p/59.94
○ 1080p/50	○ 720p50
○ 1080i/59.94	○ 720p30
○ 1080i/50	○ 720p25
○ 1080p/29.97	○ 720p24
○ 1080p25	○ SD525
○ 1080p24	○ SD625
○ 1035i/59.94	
- Two individual conversion paths. The inputs can be different standards SD or HD and unlocked to the single output format.
- Frame sync with output phase control in Frames, Lines and pixels with respect to reference. Delay setting are stored per output format for a constant latency operation.

○ 30 Frames delay offset (per channel)	
▪ 1080i60	▪ 1080p24
▪ 1080i50	▪ 1035i60
▪ 1080p30	▪ 1080p60
▪ 1080p25	▪ 1080p50
○ 60 Frames delay offset (per channel)	
▪ 720p60	▪ 720p25
▪ 720p50	▪ 720p24
▪ 720p30	
○ 125 Frames delay offset (per channel)	
▪ SD525	
▪ SD625	
- 5 GPI inputs assignable to different preset banks
 - Input selection
 - Output mode
 - Audio shuffling, gain and phase (110 only)
- ARC triggers by VI, WSS, WSSext and S2016 (AFD)
- Individual color corrector for video path A and B
- Time code swapping between the two video paths.
- Transparent for 8 channels of embedded audio per channel
- Embedded domain **cross input** audio shuffling, gain and phase control (2GF110 only)
- Embedding and de-embedding through synapse bus
- Video proc-amp (Y and C control) and Color corrector (RGB and total gain and black)
- Hue control for NTSC inputs
- Locks to Bi-level, Tri-level syncs or SDI input
- Full control and status monitoring through the front panel of the SFR08/SFR18 frame and the Ethernet port (ACP)

Complementary cards:


- DAC20, DAC24, DAS24, DIO48, ADC20, ADC24, DIO24,

Applications

- Transmission output frame synchronizer with backup input.

2GF110 only:

- Combining embedded audio channels of 2 inputs into 1 (see image below)

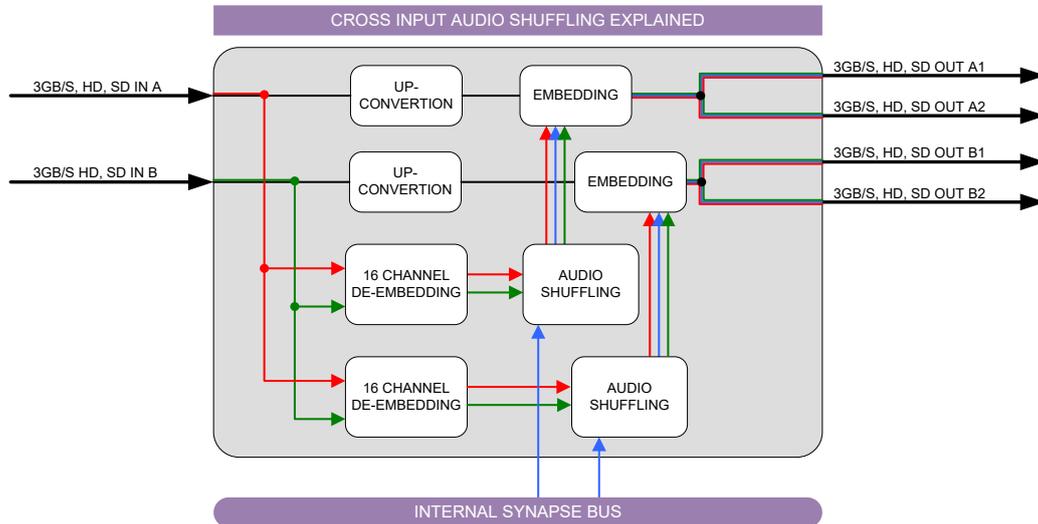

Ordering information

Module:

- **2GF100-I/O:** Dual channel 3Gb/s, HD, SD frame synchronizer
- **2GF110-I/O:** Dual channel 3Gb/s, HD, SD frame synchronizer with audio shuffler proc amp

Standard I/O:

- **BPH17-PANEL:** I/O-panel for 2GF-2HF-2SF100/110

Relay bypass I/O:

- **BHX17b-PANEL:** I/O-panel for 2GF-2HF-2SF100/110 with relay bypass and RJ45 GPI/O

Specifications

Serial video input

Standard	3Gb/s, HD and SD SDI:, SMPTE424, SMPTE 292M, SMPTE 259M
Number of inputs	2
Connector	BNC
Equalization	Typical maximum equalized length of Belden 1694A cable: 90m at 2.97Gb/s, 120m at 1.485Gb/s, and 250m at 270Mb/s
Return loss	> 15dB up to 1.5GHz

Serial video output

Number of outputs	4
Connector	BNC
Signal level	800mV nominal
DC offset	0V \pm 0.5V
Rise/fall time	135ps nominal
Overshoot	< 10% of amplitude
Return loss	> 15dB up to 1.5GHz (typ.); > 10dB up to 3GHz (typ.)
Wideband jitter	< 0.2UI

Reference Input through RRC

Number of Inputs	2 on SFR18, 2 on SFR08 and 1 on SFR04
Tri-level	SMPTE274M, SMPTE296M 600 mVp-p nominal, 75 Ohms terminated through loop
Bi-level	PAL Black Burst ITU624-4/SMPTE318, Composite NTSC SMPTE 170M 1Vp-p nominal, 75 Ohms terminated through loop

Miscellaneous

Weight	Approx. 450g
Operating temperature	0 °C to +40 °C
Dimensions	137 x 296 x 20 mm (HxWxD)

Electrical

Voltage	+24V to +30V
Power	<17 Watts