



Synapse

GRB990-950-590-550


3Gb/s, HD, SD digital or analog audio de-embedder, re-embedder, embedded domain shuffler

A Synapse® product




Due to constant product research and development all specifications are subject to change without notice. EVS does not warrant or assume any legal liability or responsibility for the accuracy, completeness, availability and/or delivery of the products and/or services listed in this datasheet. Copyright © 2021 EVS

Block schematic & I/O panel

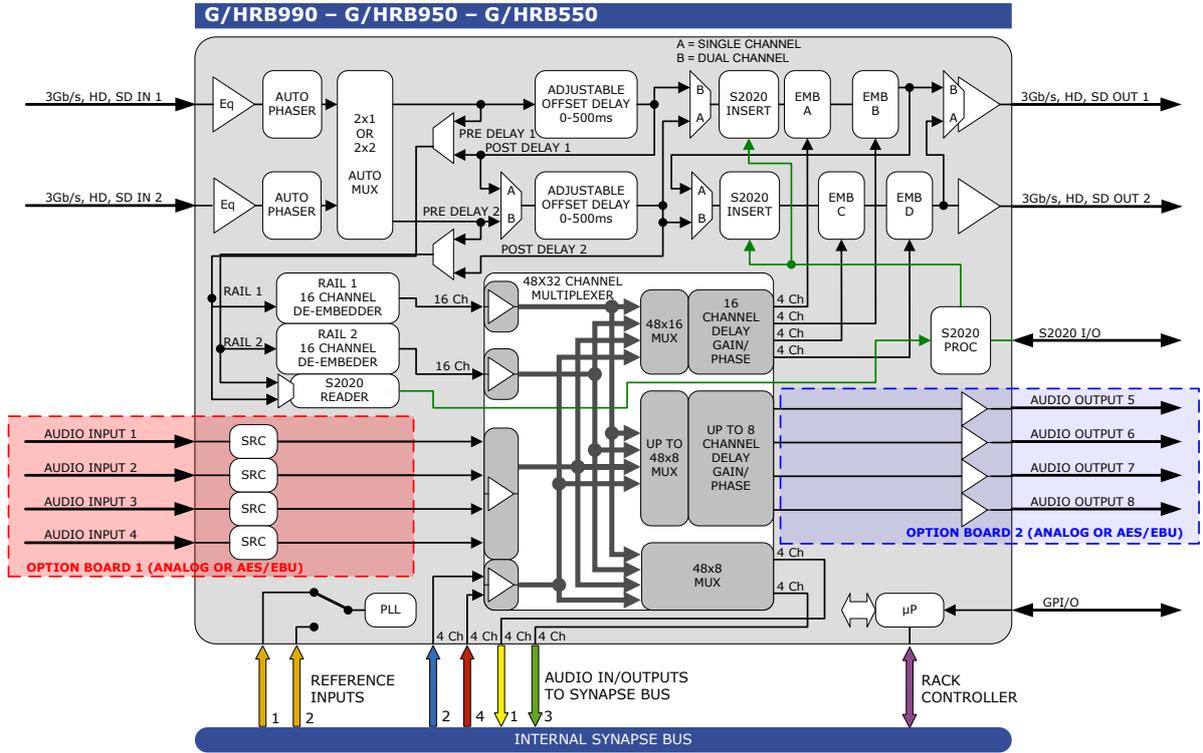

- 3Gb/s, HD, SD SDI INPUT 1
- 3Gb/s, HD, SD SDI INPUT 2
- 3Gb/s, HD, SD SDI OUT 1
- 3Gb/s, HD, SD SDI OUT 2
- GPI and METADATA (S2020) INPUT/OUTPUT
- AES/EBU OR ANALOG INPUT 1
- AES/EBU OR ANALOG INPUT 2
- AES/EBU OR ANALOG INPUT 3
- AES/EBU OR ANALOG INPUT 4
- AES/EBU OR ANALOG OUTPUT 1
- AES/EBU OR ANALOG OUTPUT 2
- AES/EBU OR ANALOG OUTPUT 3
- AES/EBU OR ANALOG OUTPUT 4

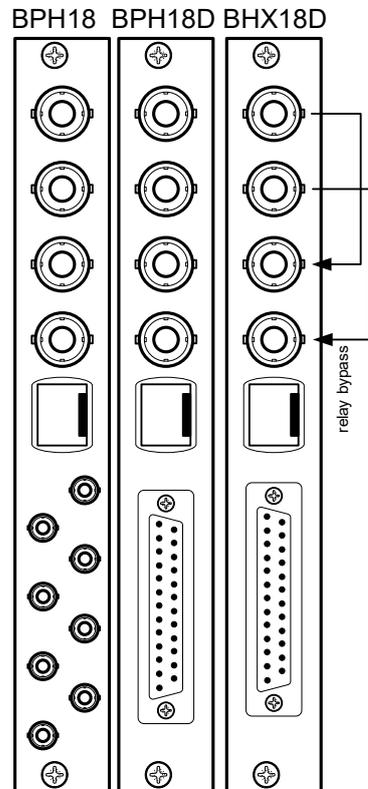

Features

The GRB990-950-590-550 is a 48x32 channel re-embedder, with a 16 channel embedder (2x 8 channels in 2 individual SDI streams), 4 AES/EBU or analog outputs, and 4 AES channels to the Synapse ADD-ON bus.

The source audio channels can be derived from 2 x 16 channel embedded domain streams, 4 AES/EBU or analog physical audio inputs and 8 channels from the Synapse bus

- 2 SDI inputs (with auto switch on carrier loss, and switch back function)
- 2 SDI outputs (2x1 or 2x2 function)
- Compatible with the following input formats (auto selecting) (1080p only for GXX):
 - 1080p/59.94
 - 1080p/50
 - 1080i/59.94
 - 1080i/50
 - 1080p/30
 - 1080p25
 - 1080p(sf)/23.98
 - 1035i/59.94
 - 720p/59.94
 - 720p50
 - SD525
 - SD625
- Dual offset VIDEO delay adjustable between 0 and 500ms
- Dual (TWINS*) or single channel SDI mode
- 4 AES/EBU inputs with sample rate converter (available with 110 Ohm and 75 Ohm inputs), or 4 analog inputs (available with balanced or unbalanced connectors).
- 4 AES/EBU outputs or 4 analog outputs.
- AES/EBU inputs accept synchronous streams like Dolby E and asynchronous up to 192kHz sampling via the built in Sample Rate Converters.
- Auto SRC-off for bitstream sources like Dolby E
- 4 extra AES/EBU inputs through the Synapse bus
- 8 presets that configure all I/O channels. controlled by GPI or ACP (Cortex)
- S2020 metadata insertion from an external source
- Append and overwrite modes
- Audio level and phase control
- Audio offset delay up to 5000 ms
- Peak detection 0dBFS
- Silence detection with threshold (-100 to -20dBFS) and time control (1 to 255 sec)
- Locks to Tri-level, Bi-level syncs or SDI input
- Full control and status monitoring through the front panel of the SFR04/SFR08/SFR18 frame and the Ethernet port (ACP)
- Optional relay bypass (BHX18 or BHX18D)

* In dual mode, or 2-SDI shuffle mode, the input signals need to be of the same SDI format

Complementary cards:

- DAC20, DAC24, DAS24, DIO48, ADC20, ADC24, DIO24

Applications

- Embedded domain shuffling with external (manipulated from internal) domain AES/EBU channels
- 3rd party audio processing from an embedded domain source

Input/Output options

This platform has 2 option boards which define the inputs of the card. Refer to the block schematic for the position of the option boards. These are the options:

Card model	Option board 1	Option board 2
GRB990	4 AES/EBU inputs (8 channels)	4 AES/EBU outputs (8 channels)
GRB950	4 AES/EBU inputs (8 channels)	4 analog outputs (4 channels)
GRB550	4 analog inputs (4 channels)	4 analog outputs (4 channels)
GRB590	4 analog inputs (4 channels)	4 AES/EBU outputs (8 channels)

Ordering information

Module:

- **GRB990-I/O:** 3Gb/s, HD, SD digital audio re-embedder/shuffler
- **GRB950-I/O:** 3Gb/s, HD, SD digital audio re-embedder/shuffler with analog outputs
- **GRB550-I/O:** 3Gb/s, HD, SD analog audio re-embedder/shuffler

Standard I/O:

- **BPH18-PANEL:** I/O panel for GRBxxx/HRBxxx with unbalanced audio in and outputs
- **BPH18D-PANEL:** I/O panel for GRBxxx/HRBxxx with balanced audio in and outputs

Relay bypass I/O:

- **BHX18D-PANEL:** I/O panel with DSub connector for GRBxxx/HRBxxx with relay bypass

Specifications

Serial Video Input

Standard	SD,HD and 3Gb/s SDI: SMPTE 292M, SMPTE 259M, SMPTE424
Number of Inputs	2
Connector	BNC
Equalization	Typical maximum equalized length of Belden 1694A cable: 90m at 2.97Gb/s, 120m at 1.485Gb/s, and 250m at 270Mb/s
Return Loss	> 15dB up to 1.5GHz

Serial Video Output

Number of Outputs	2
Connector	BNC
Signal Level	800mV nominal
DC Offset	0V \pm 0.5V
Rise/Fall Time	135ps nominal
Overshoot	< 10% of amplitude
Return Loss	> 15dB up to 1.5GHz (typ.) > 10dB up to 3GHz (typ.)
Wideband Jitter	< 0.2UI

AES/EBU Input

Connector	25 pins female sub-D (balanced) or DIN1.0/2.3 coax (unbalanced)
Standard	AES-1992 for balanced synchronous or asynchronous PCM/AES, SMPTE 276M for single ended synchronous or asynchronous PCM/AES
Number of Inputs	4 or 8
Sampling Rate	32 kHz to 96 kHz asynchronous 48 kHz Synchronous (SRC=off)

Resolution	24 bits
Minimum Input/Output Delay	2 ms
Impedance	110 Ohms or 75 Ohms
Level	0.2V to 1V nom for Coax, 2V to 7V for balanced operation

Analog Audio Input

Connector	25 pins female sub-D (balanced) or DIN1.0/2.3 coax (unbalanced)
Standard	High impedance 24 bit A/D converter
Number of Inputs	4 or 8
Resolution	24 bits
Minimum Input/Output Delay	2 ms
Impedance	10 kOhm
Level	Up to +24dBu for 0dBFS embedding, switchable to +18, +15 and +12dBu

AES/EBU Output

Connector	25 pins female sub-D (balanced) or DIN1.0/2.3 coax (unbalanced)
Standard	AES-1992 for balanced synchronous or asynchronous PCM/AES, SMPTE 276M for single ended synchronous or asynchronous PCM/AES
Number of outputs	4 or 8
Sampling Rate	48 kHz Synchronous
Resolution	24 bits
Minimum Input/Output Delay	2 ms
Impedance	110 Ohms or 75 Ohms
Level	1V nom for Coax, 2V for balanced operation

Analog Audio Output

Connector	25 pins female sub-D (balanced) or DIN1.0/2.3 coax (unbalanced)
Number of outputs	4 or 8
D/A Resolution	24 bits
Minimum Input/Output Delay	2 ms
Impedance	100 Ohms balanced and unbalanced
Level	Up to +24dBu for 0dBFS embedding, switchable to +18, +15 and +12dBu

Reference Input through RRC

Number of Inputs	2 on SFR18, 2 on SFR08 and 1 on SFR04
Tri-level	SMPTE274M, SMPTE296M 600 mVp-p nominal, 75 Ohms terminated through loop
Bi-level	PAL Black Burst ITU624-4/SMPTE318, Composite NTSC SMPTE 170M 1Vp-p nominal, 75 Ohms terminated through loop

Miscellaneous

Weight	Approx. 250g
Operating Temperature	0 °C to +50 °C
Dimensions	137 x 296 x 20 mm (HxLxD)

Electrical

Voltage	+24V to +30V
Power	<15 Watts