

EP6M-400 and EP6M-700

Elevating Pedestal



Features

- **Versatile**
Ceiling or floor mounting. Variable speed control for smooth acceleration/deceleration.
Virtual set ready.
- **Choice of sizes**
EP6M-400 & EP6M-700
- **Compatible**
Designed for the PTZ camera market. Works seamlessly with TeleGlide systems and enables coordinated pedestal/trolley/pan/tilt moves in an all- EVS system.
- **Efficient**
Accurate, absolute positional servo. Smooth quiet operation. Maximize space in small studios.
Auxiliary control bus interface.



EP6M-400 and EP6M-700 Elevating Pedestal

MODEL	MIN HEIGHT	MAX HEIGHT	TRAVEL RANGE	WEIGHT
EP6M-400	17.5" (443mm)	29.3" (743mm)	11.8" (300mm)	48lbs (22kg)
EP6M-700	25.5" (643mm)	45" (1143mm)	19.7" (500mm)	53 lbs (24kg)


SPECIFICATIONS

Speeds	Min Speed: 0.1"/Sec (2.5mm/Sec) Max Speed: 1.5"/Sec (38mm/Sec)
Maximum Load	60lbs (27kg)
Maximum Power	120 Watts

Specifications and features subject to change without notice

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
EP6M-400	EP-6M-400 Televator Elevating Pedestal
EP6M-700	EP-6M-700 Televator Elevating Pedestal
MA-EP6M-LP-S5	Mounting Adapter Plate
MA-CMM-EP6M	MA Confidence Mon Mount EP-6M
EP-DSK2	Televator Studio Kit
EPO-DSK2-EP6M	Studio Kit Option
EP8-FFD2	EP8 Folding Floor Dolly w/Swpr
EP80-FFD-LF	EP8 Ffd Leveling Feet Option

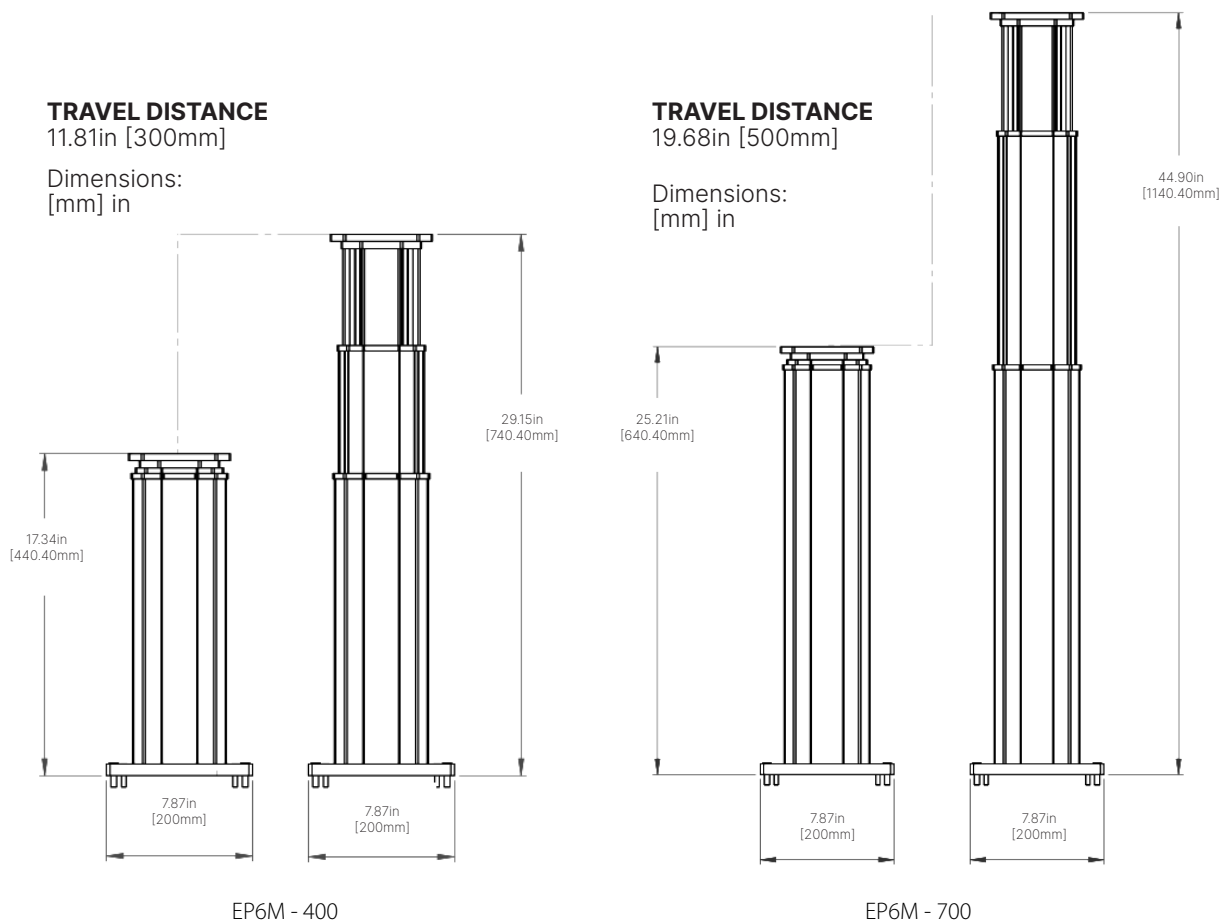

© 2021 EVS Broadcast Equipment, all rights reserved.



EVS is globally recognized as the leader in live video technology for broadcast and new media productions. Our passion and purpose are to help our clients craft immersive stories that trigger the best return on emotion. Through a wide range of products and solutions, we help deliver the most gripping live sports images, buzzing entertainment shows and breaking news content to millions of viewers every day – and in real-time.